




B-100 B-100, QB-100

XL SERIES

QB-80, B-100 FANS ARE ESPECIALLY DESIGNED FOR BATHROOMS IN APARTMENTS. IF EXCEPTIONALLY LOW NOISE LEVELS ARE REQUIRED THEN THE SUPER QUIET QB-80 FAN IS VERY USEFUL. THEY ARE AVAILABLE WITH MOUNTING BRACKETS FOR EASY INSTALLATION. QB-80 AND B-100 CONSTRUCTED OF CORROSION RESISTANT HEAVY GAUGE SATIN COAT STEEL.

B-100
BATHROOM EXHAUST FAN

QB-80
SUPER QUIET
BATHROOM EXHAUST FAN

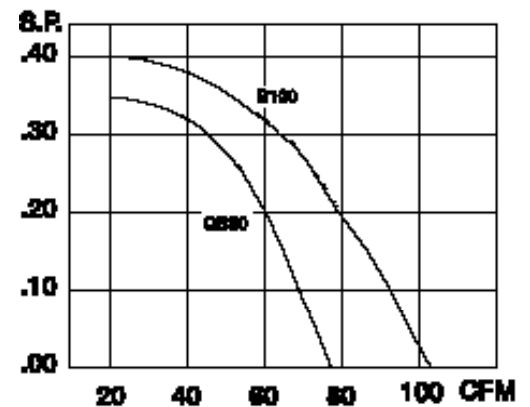


Only QB80 is
HVI certified

July, 2005

Reversomatic Manufacturing Ltd.

790 ROWNTREE DAIRY ROAD • WOODBRIDGE, ONTARIO, CANADA L4L 5V3 • PHONE (905) 851-6701 • FAX (905) 851-8376

B-100, QB-80 EXHAUST FAN

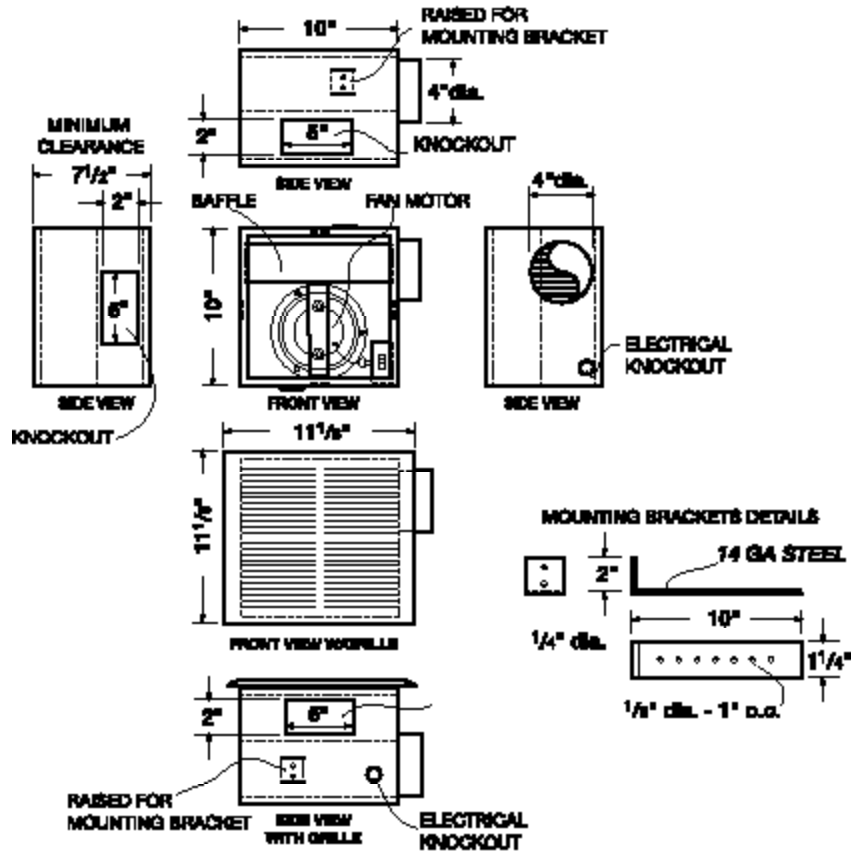

ACCESSORIES

STANDARD
DAMPER
OFF WHITE GRILLE

OPTIONAL
MOUNTING BRACKETS

FAN DATA

FAN MODEL	MOTOR 120 VAC 60 Hz			CUBIC FEET PER MINUTE									
	RPM	AMPS	HP	S.P.	.0	.05	.10	.15	.20	.25	.30	.35	.40
B-100	1400	0.60	1/90	CFM	102	97	92	86	79	72	63	50	20
QB-80	1090	0.35	1/200	CFM	77	73	69	64	60	53	45	20	

RPM (Revolutions per minute) shown is nominal and performance is based on actual speed of test. Unit was tested with inlet grille, backdraft damper and outlet duct.

SOUND RATING

		OCTAVE BAND	1	2	3	4	5	6	7	8
		CENTRE FREQUENCY Hz.	63	125	250	500	1000	2000	4000	8000
B-100	IN. W.G.	0.00	62.3	55.0	56.5	56.6	54.5	46.6	48.9	49.7
		0.19	60.2	54.7	53.5	53.8	52.3	44.0	45.6	47.0
		0.41	62.2	54.5	51.6	49.6	46.1	40.5	43.4	49.7
QB-80	STATIC PRESSURE	0.00	62.0	53.1	49.5	51.3	45.6	39.2	41.2	45.0
		0.19	61.7	54.0	48.6	48.4	46.2	38.5	39.9	42.2
		0.41	61.5	56.1	51.1	49.3	44.6	38.9	41.1	48.1

The sound power level ratings shown are in decibels, referred to 10 -12 watts calculated per AMCA Standard 301. Values shown are for inlet Lwi sound power levels for installation Type B: free inlet, ducked outlet. Ratings do not include the effects of duct end correction.

CONTRACTOR		B-100, QB-80 FAN DETAIL		
ARCHITECT	JOB	DATE	SUPERSEDES	DRAWING NO.
ENGINEER	DATE SUBMITTED	REVERSOMATIC Manufacturing Ltd Toronto, Ontario		