


GENERAL PURPOSE ENERGY STAR INLINE EXHAUST FANS

2 Speed Option Available Upon Request


GENERAL PURPOSE INLINE EXHAUST FANS

- Engineered to provide high air volume and powerful static pressure performance.
- Compact construction for ease of installation in confined spaces.
- Built with a well balanced air over motor impeller assembly, for smooth operation.
- High efficiency motor.
- Available with two and three inlets.
- Fan housing constructed of heavy gauge satin coat galvanized steel finish.
- Suitable for use in high-rise condominium, office buildings, schools, boardrooms or where high volume quiet ventilation is required.
- The models TL240ES & TL340 are Certified by California Energy Commission in accordance with California Law - Title 20.
- Also meet Washington State Ventilation and Indoor Air Quality Code.

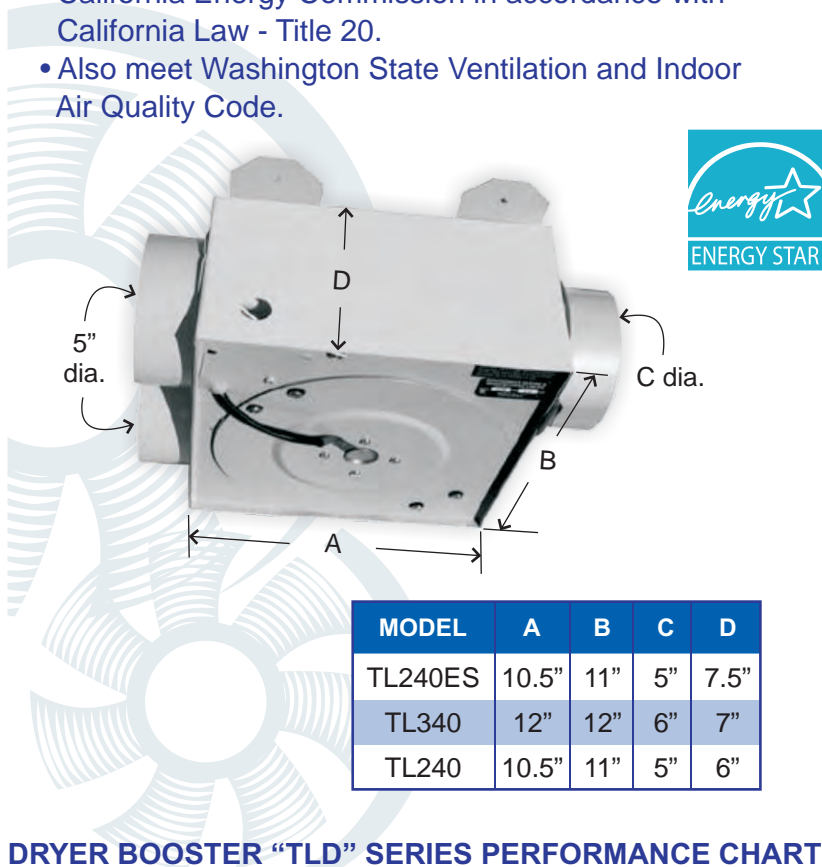


MODEL	A	B	C	D
TL240ES	10.5"	11"	5"	7.5"
TL340	12"	12"	6"	7"
TL240	10.5"	11"	5"	6"

TL240 & TL240ES FAN DATA

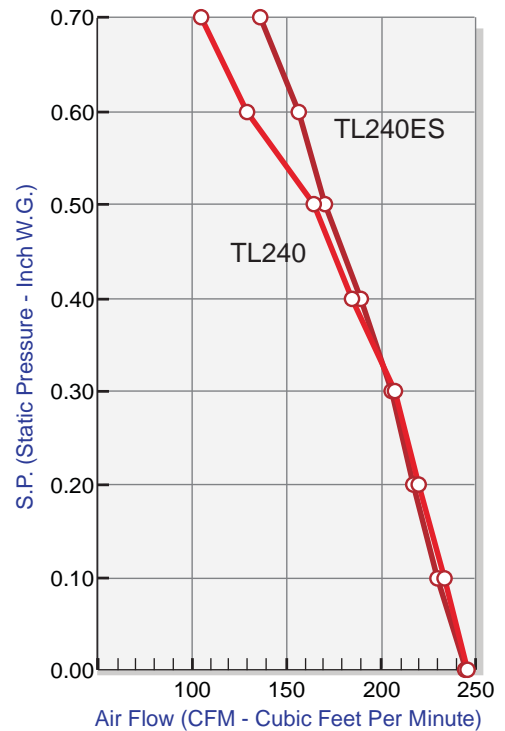

TL340 (2 & 3 inlets) FAN DATA

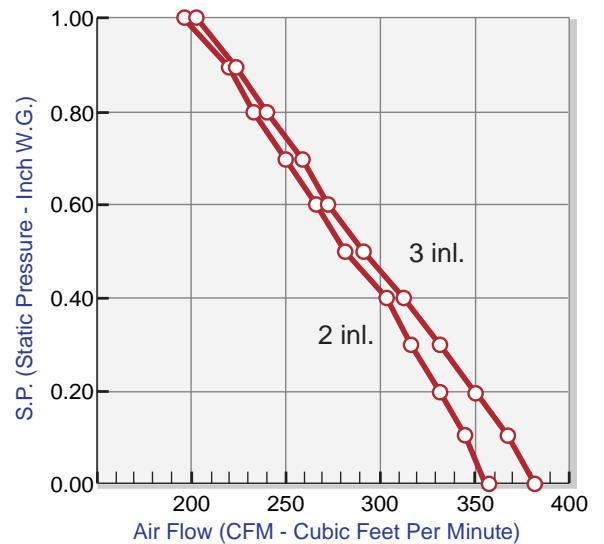

DRYER BOOSTER "TLD" SERIES PERFORMANCE CHART

MODEL	RPM	AMPS	S.P.	0.00	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
TL240ES (2 inlets)	1600	0.70	CFM	246	230	217	205	191	173	156	138	-	-	-
TL340 (2 inlets)	1150	1.05		358	345	332	317	303	282	267	251	233	218	197
TL340 (3 inlets)	1150	1.05		383	368	350	332	313	292	273	259	241	224	203
TL240 (2 inlets)*	1600	0.70		246	233	219	204	185	163	131	131	-	-	-

RPM (Revolution Per Minute) shown is nominal and performance is based on actual speed of test.

*Non-Energy Star Fan