


# REVERSOMATIC 2" EXTRUDED ALUMINUM CUSTOM LOUVERS

*REVERSOMATIC 2" (50 mm) louver is designed to provide protection from water penetration*

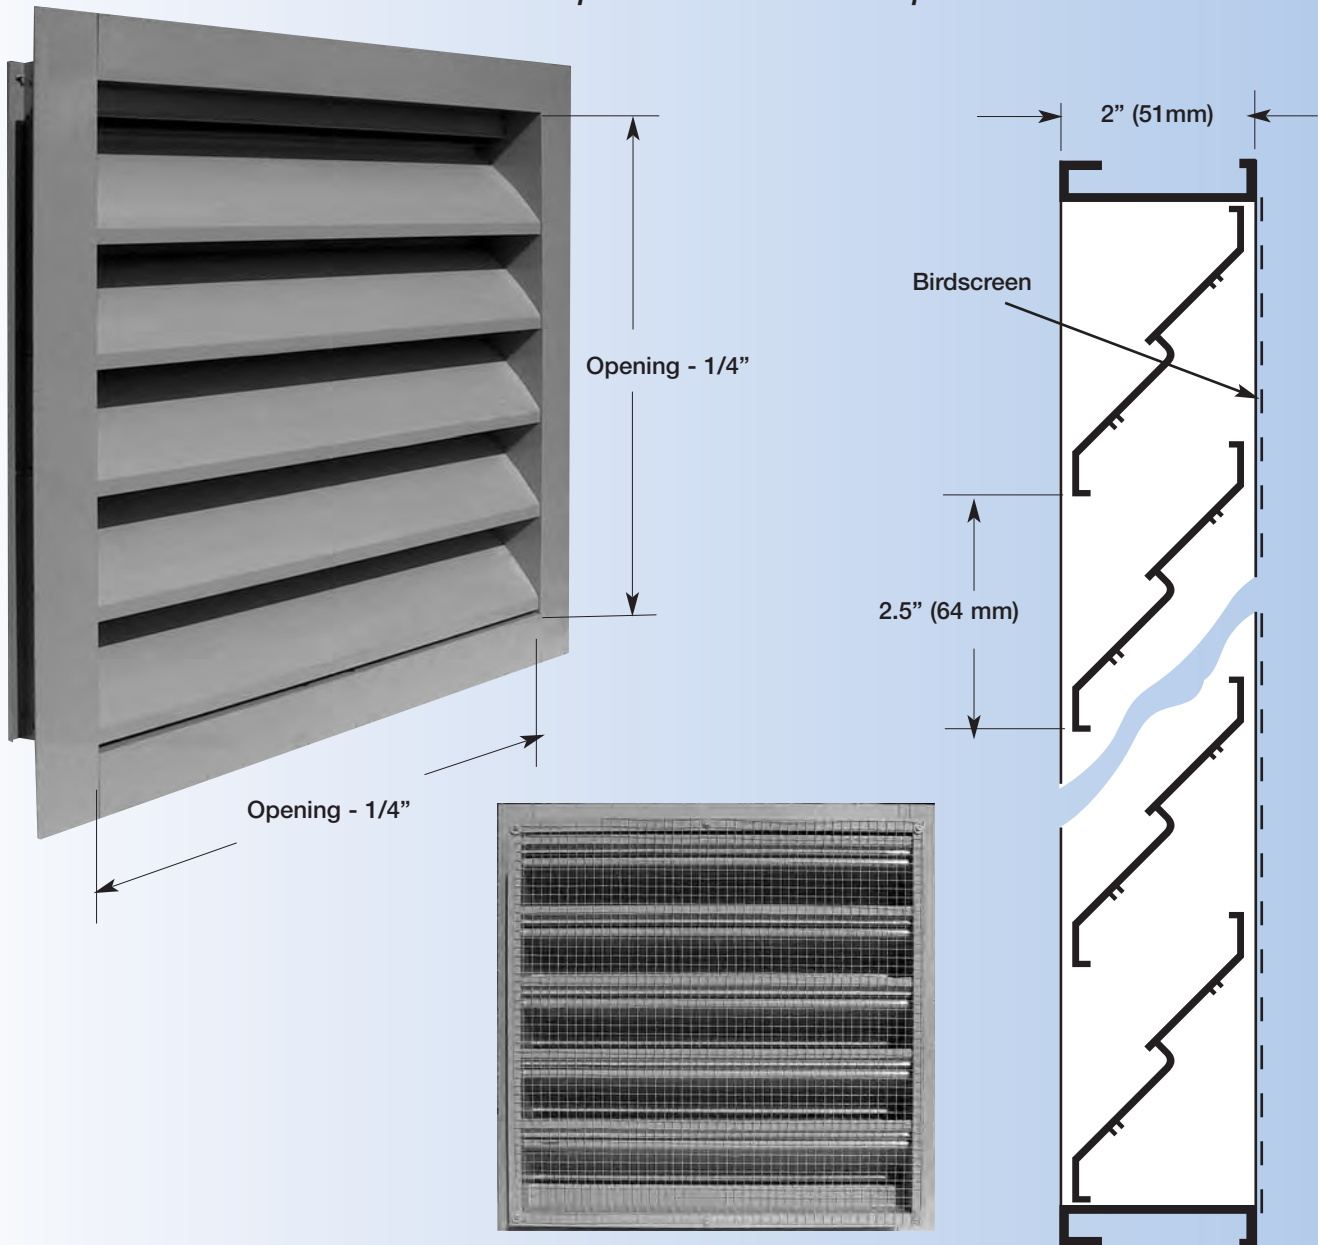

STANDARD FINISH: Mill Finish

OPTION: Any colour baked enamel finish, anodized finish

## SPECIFICATIONS

Blade Material	Blade Angle	Blade Center	Frame Material	Louver Depth	Bird Screen
Extruded Alum. 0.062" (1.57mm)	45 deg.	2.5" 64 mm	Extruded Alum. 0.062" (1.57mm)	2" 51mm	.5" x .5" 19 ga. galv

## FREE AREA IN SQUARE METERS

		WIDTH IN CENTIMETERS															
		30.5	40.6	50.8	61.0	71.1	81.3	91.4	101.6	111.8	121.9	132.1	142.2	152.4	162.6	172.7	182.9
H	30.5	0.027	0.037	0.047	0.058	0.068	0.078	0.089	0.100	0.110	0.120	0.130	0.140	0.152	0.162	0.172	0.182
E	40.6	0.037	0.051	0.066	0.080	0.095	0.109	0.124	0.138	0.153	0.166	0.181	0.195	0.210	0.224	0.239	0.254
I	50.8	0.047	0.066	0.085	0.103	0.121	0.140	0.158	0.177	0.195	0.214	0.233	0.251	0.269	0.287	0.306	0.325
G	61.0	0.058	0.080	0.103	0.126	0.148	0.170	0.193	0.216	0.238	0.260	0.283	0.306	0.328	0.351	0.373	0.396
H	71.1	0.068	0.095	0.121	0.148	0.175	0.201	0.228	0.254	0.281	0.307	0.334	0.361	0.387	0.414	0.440	0.467
T	81.3	0.078	0.109	0.140	0.170	0.201	0.232	0.262	0.293	0.324	0.354	0.385	0.416	0.446	0.477	0.508	0.538
	91.4	0.089	0.124	0.158	0.193	0.228	0.262	0.297	0.332	0.366	0.401	0.436	0.471	0.505	0.539	0.575	0.609
I	101.6	0.100	0.138	0.177	0.216	0.254	0.293	0.332	0.370	0.409	0.448	0.486	0.525	0.565	0.603	0.642	0.680
N	111.8	0.110	0.153	0.195	0.238	0.281	0.324	0.366	0.409	0.452	0.495	0.538	0.580	0.623	0.666	0.709	0.751
	121.9	0.120	0.166	0.214	0.260	0.307	0.354	0.401	0.448	0.495	0.541	0.589	0.635	0.682	0.729	0.776	0.822
C	132.1	0.130	0.181	0.233	0.283	0.334	0.385	0.436	0.486	0.538	0.589	0.639	0.690	0.741	0.792	0.843	0.894
E	142.2	0.140	0.195	0.251	0.306	0.361	0.416	0.471	0.525	0.580	0.635	0.690	0.745	0.800	0.855	0.910	0.964
N	152.4	0.152	0.210	0.269	0.328	0.387	0.446	0.505	0.565	0.623	0.682	0.741	0.800	0.859	0.918	0.977	1.036
T	162.6	0.162	0.224	0.287	0.351	0.414	0.477	0.539	0.603	0.666	0.729	0.792	0.855	0.918	0.981	1.044	1.107
I	172.7	0.172	0.239	0.306	0.373	0.440	0.508	0.575	0.642	0.709	0.776	0.843	0.910	0.977	1.044	1.111	1.178
M	182.9	0.182	0.254	0.325	0.396	0.467	0.538	0.609	0.680	0.751	0.822	0.894	0.964	1.036	1.107	1.178	1.249

## FREE AREA IN SQUARE FEET

		WIDTH IN INCHES															
		12	16	20	24	28	32	36	40	44	48	52	56	60	64	68	72
H	12	0.29	0.40	0.51	0.62	0.73	0.84	0.96	1.07	1.18	1.29	1.40	1.51	1.63	1.74	1.85	1.96
E	16	0.40	0.55	0.71	0.86	1.02	1.17	1.33	1.48	1.64	1.79	1.95	2.10	2.26	2.41	2.57	2.73
I	20	0.51	0.71	0.91	1.11	1.30	1.50	1.70	1.90	2.10	2.30	2.50	2.70	2.89	3.09	3.29	3.49
G	24	0.62	0.86	1.11	1.35	1.59	1.83	2.07	2.32	2.56	2.80	3.04	3.29	3.53	3.77	4.01	4.26
H	28	0.73	1.02	1.30	1.59	1.88	2.16	2.45	2.73	3.02	3.30	3.59	3.88	4.16	4.45	4.73	5.02
T	32	0.84	1.17	1.50	1.83	2.16	2.49	2.82	3.15	3.48	3.81	4.14	4.47	4.80	5.13	5.46	5.78
	36	0.96	1.33	1.70	2.07	2.45	2.82	3.19	3.57	3.94	4.31	4.69	5.06	5.43	5.80	6.18	6.55
I	40	1.07	1.48	1.90	2.32	2.73	3.15	3.57	3.98	4.40	4.82	5.23	5.65	6.07	6.48	6.90	7.31
N	44	1.18	1.64	2.10	2.56	3.02	3.48	3.94	4.40	4.86	5.32	5.78	6.24	6.70	7.16	7.62	8.08
	48	1.29	1.79	2.30	2.80	3.30	3.81	4.31	4.82	5.32	5.82	6.33	6.83	7.33	7.84	8.34	8.84
I	52	1.40	1.95	2.50	3.04	3.59	4.14	4.69	5.23	5.78	6.33	6.87	7.42	7.97	8.52	9.06	9.61
N	56	1.51	2.10	2.70	3.29	3.88	4.47	5.06	5.65	6.24	6.83	7.42	8.01	8.60	9.19	9.78	10.37
C	60	1.63	2.26	2.89	3.53	4.16	4.80	5.43	6.07	6.70	7.33	7.97	8.60	9.24	9.87	10.51	11.14
H	64	1.74	2.41	3.09	3.77	4.45	5.13	5.80	6.48	7.16	7.84	8.52	9.19	9.87	10.55	11.23	11.90
E	68	1.85	2.57	3.29	4.01	4.73	5.46	6.18	6.90	7.62	8.34	9.06	9.78	10.51	11.23	11.95	12.67
S	72	1.96	2.73	3.49	4.26	5.02	5.78	6.55	7.31	8.08	8.84	9.61	10.37	11.14	11.90	12.67	13.43