



CF-170-2 (Two Speed)

Constant Ventilation Fan
MAY 2010

ULTRA QUIET EXHAUST FAN

The CF-170-2 fan is designed for high performance and quiet operation. This fan is equipped with specially designed mounting slots that allow for easy installation on concrete ceilings or wooden joists. It is constructed with corrosion resistant, heavy gauge satin coat steel. The CF-170-2 is available with 2 speed motor and 2 "ON" position switch for constant ventilation. One speed is always on. The fan is suitable for installation over bath tub or shower stall with GFCI protected branch circuit.




Hi-impact
Polystyrene
collar

White High Impact
Styrene Grille

Off White
Aluminum Grille

CF-170-2 FAN DATA

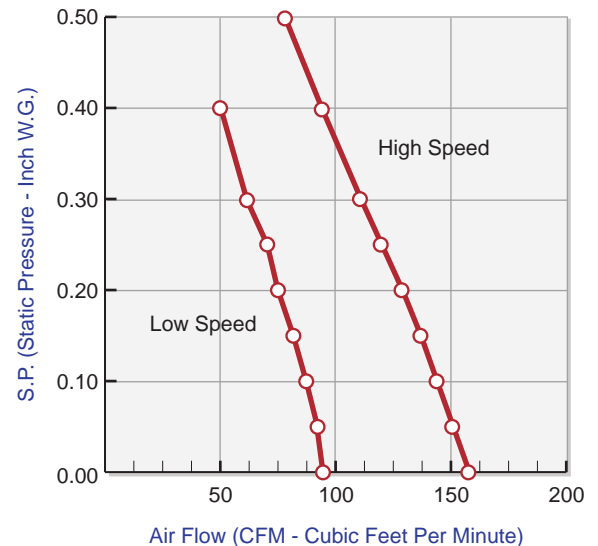

ACCESSORIES

Standard:

- Insulated housing
- Metal collar with neoprene damper
- Mounting brackets
- Aluminum or styrene grille

Optional:


- Aluminum backdraft damper
- 3 position toggle switch (on/off/on)
- Hi-impact Polystyrene collar




Reversomatic Manufacturing Ltd.

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
www.reversomatic.com • info@www.reversomatic.com

CF-170-2 (Two Speed)

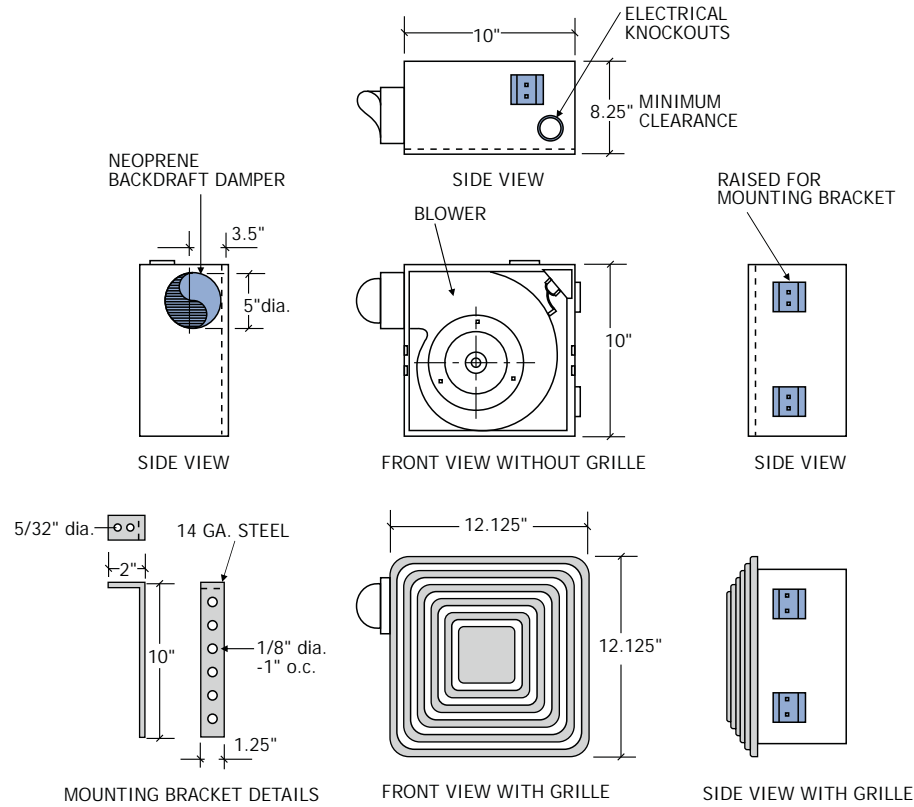

Wiring Diagram:

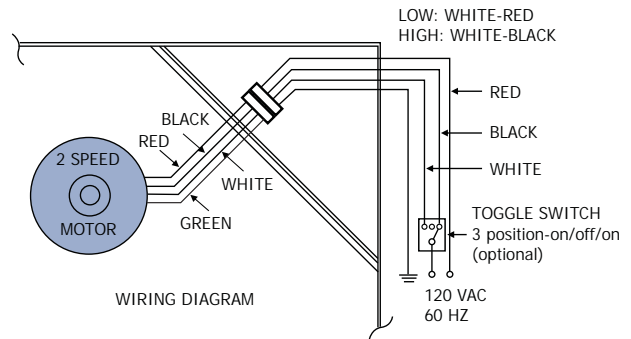

HVI RATING:
140 CFM @ 0.10" S.P., 2.5 Sones
(High Speed Only)

FAN DATA

MODEL	MOTOR 120 VAC 60 Hz		CUBIC FEET PER MINUTE										SONE
	RPM	AMPS	S.P.	0.00	0.05	0.10	0.15	0.20	0.25	0.30	0.40	0.50	
CF-170-2	1400	0.7	CFM	158	151	144	137	129	120	111	94	78	@ 0.10
	1000	0.5	CFM	95	91	87	81	76	69	60	49	-	0.7

RPM (Revolution Per Minute) shown is nominal and performance is based on actual speed of test. Unit was tested with inlet grille, backdraft damper and outlet duct.

Contractor:		CF-170-2 (Two Speed)		
Architect:	Job:	Date	Supersedes	Drawing No.
Engineer:	Date Submitted:			

Reversomatic Manufacturing Ltd.

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
 www.reversomatic.com • info@reversomatic.com