




GENERAL PURPOSE INLINE AND DRYER EXHAUST FANS


- Self cleaning, non overloading wheel.
- Engineered for quiet continuous operation making it perfect for general purpose ventilation and dryer exhaust application.
- Low profile construction simplifies installation in those tight spaces.
- Built with a well balanced motor impeller assembly, and a backward inclined wheel for smooth quiet operation.
- High efficiency motor.
- Hinged impeller for ease of cleaning and maintenance.
- Available with one, two and three inlets.
- Fan housing constructed of heavy gauge satin coat galvanized steel finish.
- The logical choice for use in high-rise condominium applications.
- Also meet Washington State Ventilation and Indoor Air Quality Code.




TLD-200 (1 inlet & 2 inlets) FAN DATA

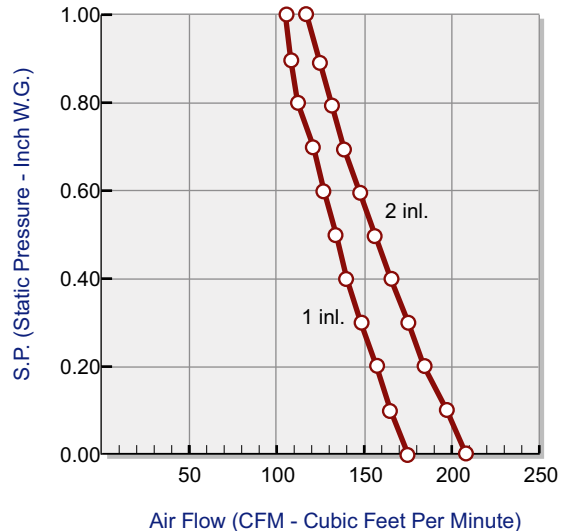

TLD-300 (1 inlet & 2 inlets) FAN DATA

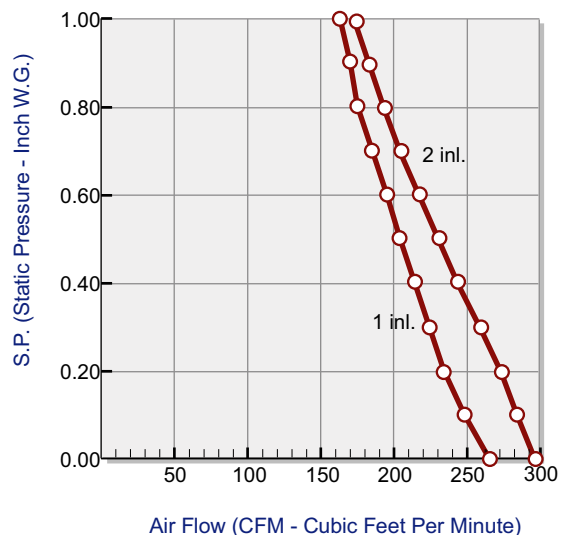

TLD-200, TLD-300

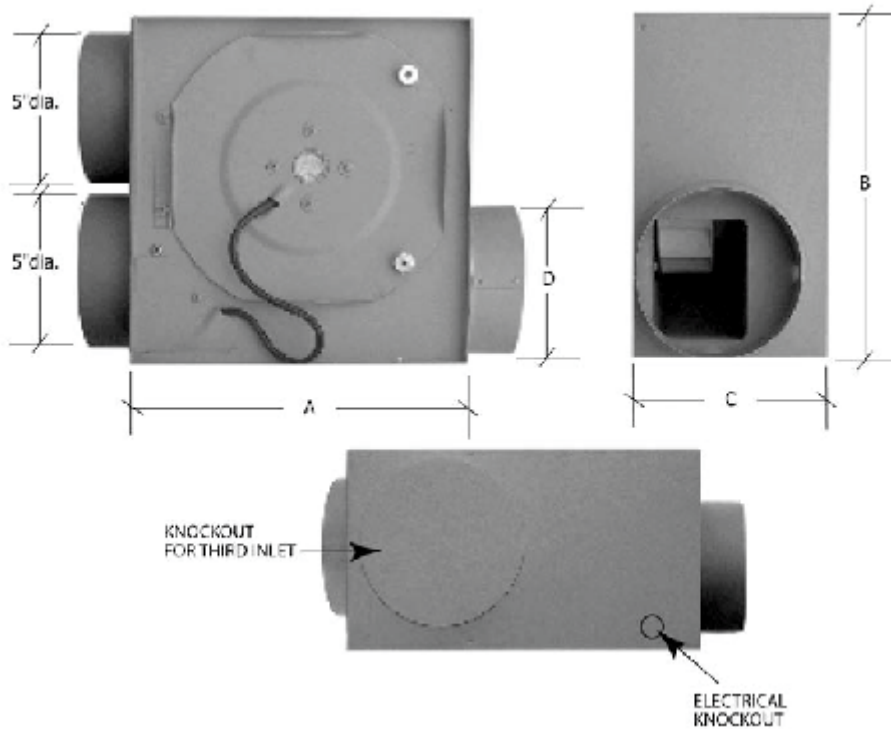

Also available in stainless steel construction for gas dryer.

HVI CERTIFIED RATINGS

| MODEL | CFM @ 0.20" S.P. |
|--------------------|------------------|
| TLD-200 (2 inlets) | 180 |
| TLD-300 (2 inlets) | 270 |

DIMENSION DATA

| FAN TYPE | A | B | C | D |
|----------|------|----|---|---|
| TLD-200 | 10.5 | 11 | 6 | 5 |
| TLD-300 | 12 | 12 | 8 | 6 |

All dimensions are shown in inches.

FAN DATA

| MODEL | MOTOR 120 VAC 60 Hz | | CUBIC FEET PER MINUTE | | | | | | | | | | | |
|-------------------|---------------------|------|-----------------------|------|------|------|------|------|------|------|------|------|------|------|
| | RPM | AMPS | S.P. | 0.00 | 0.10 | 0.20 | 0.30 | 0.40 | 0.50 | 0.60 | 0.70 | 0.80 | 0.90 | 1.00 |
| TLD-200(1 inlet) | 2500 | 0.70 | CFM | 175 | 165 | 157 | 148 | 140 | 134 | 127 | 121 | 112 | 108 | 105 |
| TLD-200(2 inlets) | 2500 | 0.70 | CFM | 208 | 197 | 184 | 175 | 165 | 156 | 147 | 138 | 131 | 124 | 117 |
| TLD-300(1 inlet) | 2550 | 1.00 | CFM | 265 | 248 | 234 | 224 | 214 | 204 | 195 | 185 | 175 | 170 | 163 |
| TLD-300(2 inlets) | 2550 | 1.00 | CFM | 292 | 280 | 269 | 255 | 240 | 227 | 214 | 201 | 190 | 180 | 170 |

RPM (Revolution Per Minute) shown is nominal and performance is based on actual speed of test.

| | | | | |
|-------------|-----------------|------------------|------------|-------------|
| Contractor: | | TLD-200, TLD-300 | | |
| Architect: | Job: | Data | Supersedes | Drawing NO. |
| Engineer: | Date Submitted: | | | |

Reversomatic Manufacturing Ltd.

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
 www.reversomatic.com • info@reversomatic.com