





GENERAL PURPOSE INLINE AND DRYER EXHAUST FAN

- Self cleaning, non overloading wheel.
- Engineered for quiet continuous operation making it perfect for general purpose ventilation and dryer exhaust application.
- Low profile construction simplifies installation in those tight spaces.
- Built with a well balanced motor impeller assembly, and a backward inclined wheel for smooth quiet operation.
- High efficiency motor.
- Hinged impeller for ease of cleaning and maintenance.
- Available with one, two and three inlets.
- Fan housing constructed of heavy gauge satin coat galvanized steel finish.
- The logical choice for use in high-rise condominium applications.
- 1 year warranty

TLD-200 (1 inlet & 2 inlets) FANDATA

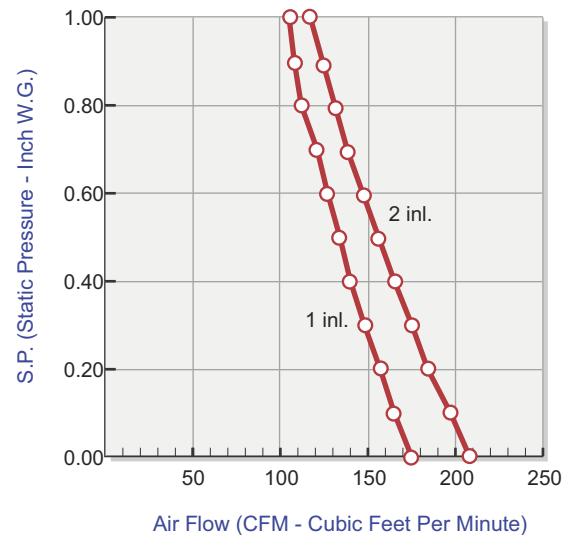

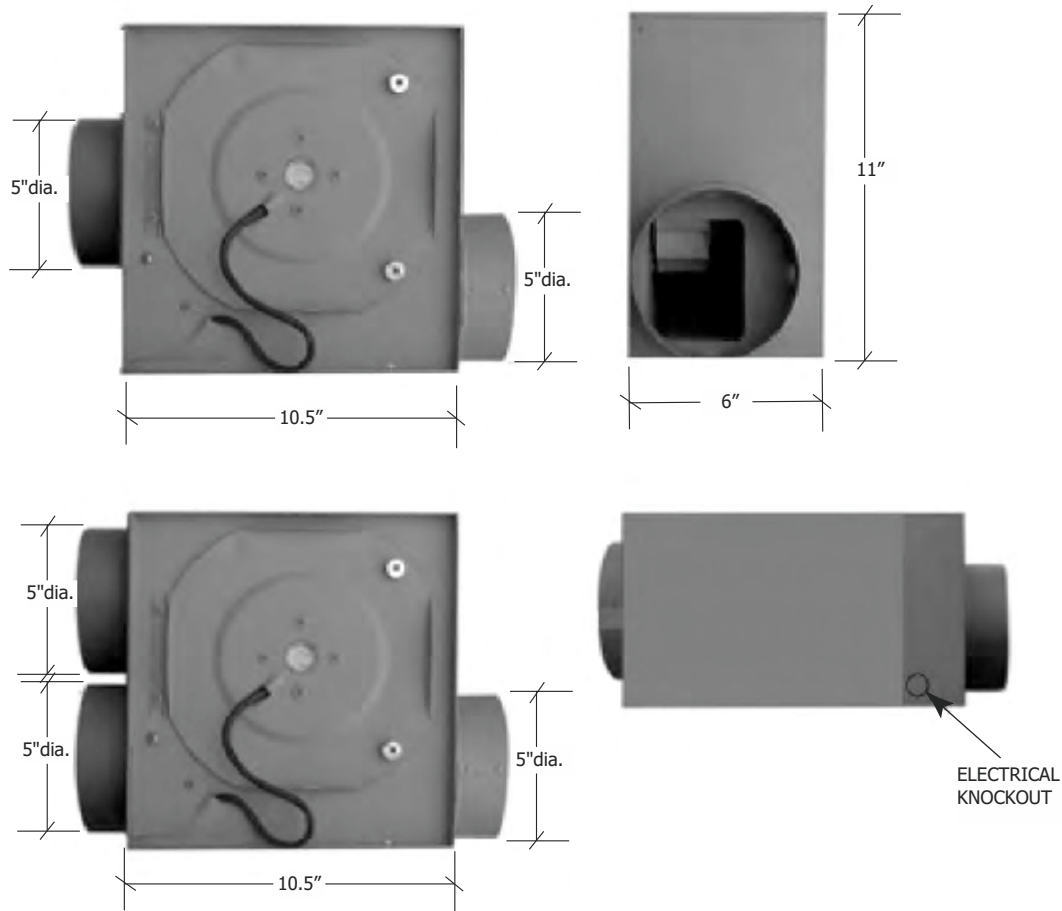

HVI CERTIFIED RATINGS

MODEL	CFM @ 0.20 SP.
TLD-200BC (2 inlets)	180

FAN DATA

MODEL	MOTOR 120 VAC 60 Hz			CUBIC FEET PER MINUTE												
	RPM	AMPS	WATTS	0.00	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00		
TLD-200BC (1 inlet)	2500	0.70	78	CFM 175	165	157	148	140	134	127	121	112	108	105		
TLD-200BC (2 inlets)	2500	0.70	78	CFM 208	197	184	175	165	156	147	138	131	124	117		

RPM (Revolution Per Minute) shown is nominal and performance is based on actual speed of test.

Contractor:	TLD-200BC		
Architect:	Date	Supersedes	Drawing No.
Engineer:			

Reversomatic Manufacturing Ltd.

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
www.reversomatic.com • info@reversomatic.com